

Quick Guide

English

SeaSwing®

Sailing "Baby"

1. Congratulations with your Seaswing Sailing Baby.

The Seaswing is a Baby Chair to be used on Board. You can attach your usual Baby Car Seat (Maxi Cosi or Römer) to the Seaswing Sailing Baby. Please only use the Seaswing in the Cabin of a Sailing Boat or slow Sailing Motorvessel. It is not to be used on Speedboats due to high Forces. The Seaswing Baby is especially designed for Children up to 9 Months old and is very easy to use and store.

Because of the Seaswing the Child and the Captain can both enjoy the Journey safely. Please read the Instructions in this Quick Guide carefully and make sure that you are in Possession of the following Parts (Pict. 1):



seaSwing®

Sailing "Baby"

2. Mounting instruction

2.1 Mounting the Mast Support

Please always make sure that the Female Connector is connected well to the Mast Support Plate using the Hex Socket Bolts (4X) (Pict.2).


Mount the Mast Support Plate on the Mast in the Cabin of your Boat using the 3 Belts (Pict 3, Pict 4).



Please make sure that the Mast Support Plate, Belts and the Rubber are positioned as shown (Pict 3, Pict 4).



Fasten each Belt as tight as possible using the Buckle (Pict 5). Check the Buckles regularly during the Sailtrip.

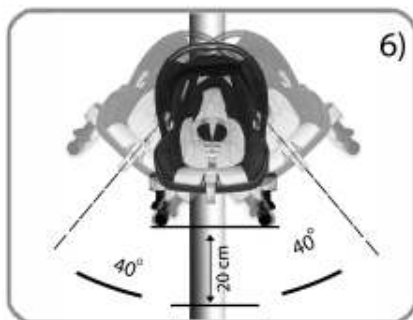

Please always make sure while positioning the Seaswing Mast Support that the Seaswing is able to move freely in every Direction (Pict 6).

seaSwing®

Sailing "Baby"

2.3 Mounting the Baby Seat



Please Connect the Adapters (provided with your Baby Car Seat (Maxi Cosi or Römer) (Pict. 12) to your Baby Car Seat.

Position the Adapters (Left and Right) on your Baby Car Seat above the Seaswing holders (Left and Right) (Pict. 13).



Let the Baby Car Seat Adapters slide on the Seaswing holders .
You should feel and hear a Click (Pict. 13, 14).

Push the Holders of the Seaswing into the Adapters as far as possible.



Important:

Use a lot of force on the Seat to check if the Seat is fastened properly (Pict. 15).

If not please repeat Instruction 2.1, 2.2 and 2.3.



You can now safely put your Child in the Seaswing.

Please always close the Buckles of the Seatbelts of your Baby Car Chair.

Important:

Never leave your Child unattended. Avoid serious Injury from falling or sliding out.
Always use Seatbelts.



seaSwing[®]


Sailing "Baby"

3. Disconnecting Instructions

Please disconnect the Baby Car Seat from the Seaswing by pushing the button of the Adapters and pulling the Baby Car Seat up.



Before disconnecting the Seaswing Baby Frame from the Mast Support always place your Baby Car Seat with your Baby on a safe Location aboard under Supervision of an Adult.

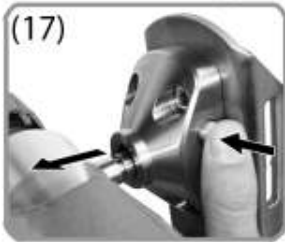

Disconnect the Frame from the Mast Support by pushing the Button and pulling the Male Part (Frame) out of the Female Part (Mast Support) (Pict 17).



After the Frame is taken off unleash all the Belts by opening the Buckles (Pict.18)

Caution:
The Mast Support Plate is made of steel and can scratch the Interior of your Boat if not handled carefully.



4. Maintenance Instructions

The Male Connector assembly on the Frame contains Bearings. Always keep the Bearings clean and lubricate them regularly with oil.

Storage:
Always store the Seaswing Sailing Baby Parts on a dry Location aboard. Wrap the Mast Support Connector in an old Cloth before storage on a dry Location.

seaSwing[®]

Sailing "Baby"

5. Disclaimer

- The Captain and the Parents are at any time responsible for safe placing of their Child aboard in the Seaswing Sailing.
- Kids Nautique can not be held responsible for any Damage that may occur due to wrong placement aboard or use during extreme Circumstances like strong Winds and/or high Waves.
- The Seaswing Sailing Baby does not prevent your Child from being Seasick during a sailtrip.
- The Seaswing Sailing Baby is designed for common Boattrips without extreme Circumstances. The Captain and the Parents are fully responsible for the Decision of placing a Child in the Seaswing Sailing during certain Conditions.
- The Captain and the Parents are responsible for checking the Connection of the Mast Support and all the other Connections.
- The Captain must tighten the Belts whenever unleached during Sailtrip.
- The Child must ALWAYS wear an approved Lifejacket aboard and nearby the Waterfront



Warning

The Mast Support of the Seaswing must be connected tightly to the Mast in the Cabin of your Boat. Wrong use or placement of the Seaswing may cause severe Injury or damage to the Child.