

## Quick Guide

English

# seaSwing®

Sailing "Toddler"

### 1. Congratulations with your Seaswing Sailing.


The Seaswing is a Chair for Children on Board.

Please only use the Seaswing in the Cabin of a Sailing Boat or slow Sailing Motorvessel. It is not to be used on Speedboats due to high Forces.

The Toddler is especially designed for Children from 9 Months up to 4 Years old (maximum 18 kilo) and is very comfortable.

Because of the Seaswing the Child and the Captain can both enjoy the Journey safely. The Seaswing is modular and easy to store.

Please read the Instructions in this Quick Guide carefully and make sure that you are in Possession of the following Parts (Pict. 1):

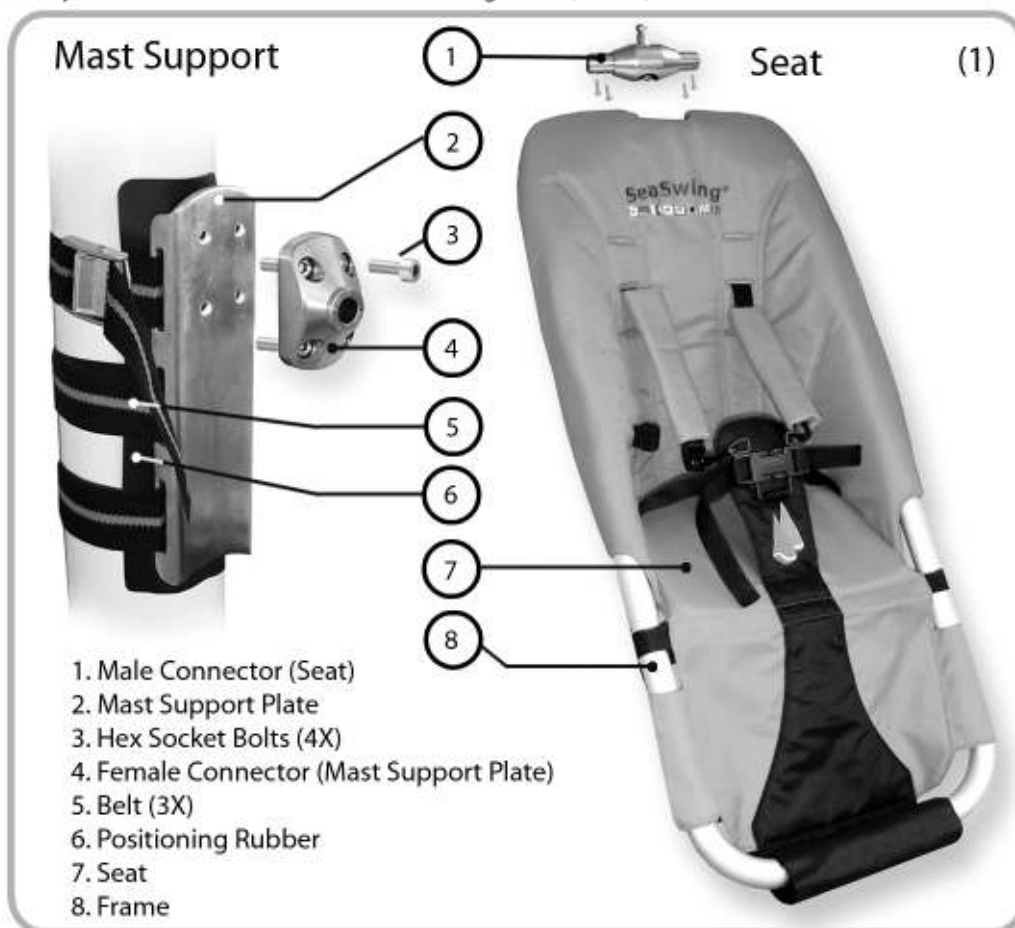

# seaSwing®

Sailing "Toddler"

## 2. Mounting instruction

### 2.1 Mounting the Mast Support

Please always make sure that the Mast Support Connector is connected well to the Mast Support Plate using the Hex Socket Bolts (4X) (Pict.2).


Mount the Mast Support Plate on the Mast in the Cabin of your Boat using the 3 Belts (Pict 3, Pict 4).



Please make sure that the Mast Support Plate, Belts and the Rubber are positioned as shown (Pict 3, Pict 4).



Fasten each Belt as tight as possible using the Buckle (Pict 5). Check the Buckles regularly during the Sailtrip.

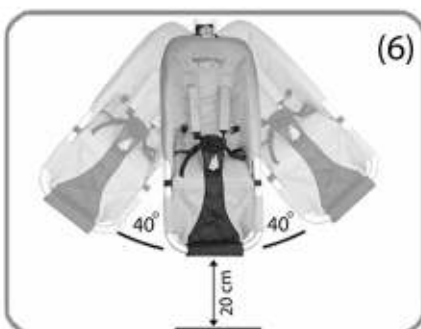


Please always make sure while positioning the Seaswing Mast Support that the Seaswing is able to move freely in every Direction (Pict 6).

# seaSwing®


Sailing "Toddler"

## 2. 2 Mounting the Seat

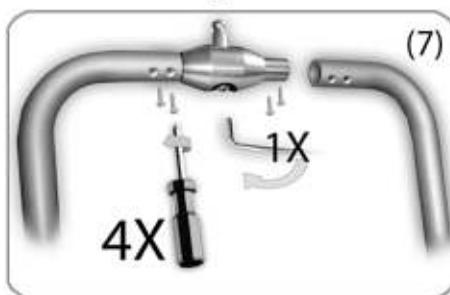

Please first make sure that the Female Connector Assembly on the Frame is connected well by checking the main Hex Socket Bolt (1X) (Pict 7).

Also make sure that the Female Connector Assembly is connected well to the Frame by checking the Screws (4X)(Pict 7).

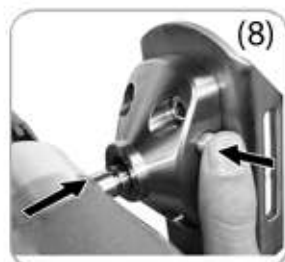


Now position the Male Connector (Seat) in front of the Female Connector (Mast Support).

Push the Button while connecting the Male Connector (Seat) into the Female Connector (Mast Support). A click should be heard and felt while connecting. Release the button when the Male Connector is completely set in the Mast Support Connector.



**Important:**  
Use a lot of force on the Seat to check if the seat is fastened properly (Pict. 9).  
If not please repeat Instruction 2.1 and 2.2.

You can now safely put your Child in the Seaswing. Please always close the Buckles of the Seatbelt (Pict. 10).

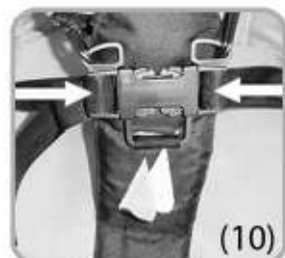


**Important:**  
Never leave your Child unattended. Avoid serious Injury from falling or sliding out. Always use Seatbelts.  
Not recommended for children under 9 Months old.

**Handy:** The Buckles have special D-Rings for hanging Bottles or Rattles or other Toys (Pict.10).

## 3. Disconnecting Instructions

Before disconnecting the Seaswing Sailing from the Mast Support always place your Child on a safe Location aboard or under Supervision of an Adult.

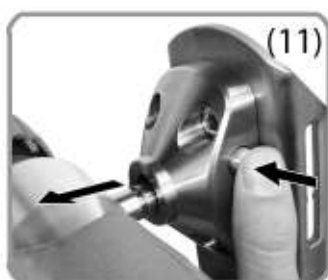

Disconnect the Seat from the Mast Support by pushing the Button and pulling the Male Part (Seat) out of the Female Part (Mast support) (Pict 11).

After the Seat is taken off unleash all the Belts by opening the Buckles (Pict.12)



**Caution:**  
The Mast Support Plate is made of steel and can scratch the Interior of your Boat if not handled carefully.



## 4. Maintenance Instructions

The Male Connector assembly on the Seat Frame contains Bearings. Always keep the Bearings clean and lubricate them regularly with oil.

**Storage:**  
Always store the Seaswing Sailing Toddler Parts on a dry Location aboard. Wrap the Mast Support Connector in an old Colth before storage on a dry Location.

## Quick Guide

English

# seaSwing®


Sailing "Toddler"

## 5. Cleaning

The Seat can be disassembled from the Frame.  
Undo the 5 Velcro Connections at the back of the Seat (Pict. 13).  
You can slide the Seat off as shown (Pict. 14).



Before washing take the plastic and foam Parts out of the Seat (Pict. 15).

**Caution:**  
The textile Seat must be washed separately by Hand at 30° Celsius. 

The Shoulder Parts (Pict. 15) can be taken off separately and can be washed separately by Hand at 30° Celsius as well.

## seaSwing® Sailing "Toddler"

### 6. Disclaimer

- The Captain and the Parents are at any time responsible for safe placing of their Child aboard in the Seaswing Sailing.
- Kids Nautique can not be held responsible for any Damage that may occur due to wrong placement aboard or use during extreme Circumstances like strong Winds and/or high Waves.
- The Seaswing Toddler does not prevent your Child from being Seasick during a sailtrip.
- The Seaswing Toddler is designed for common Boattrips without extreme Circumstances. The Captain and the Parents are fully responsible for the Decision of placing a Child in the Seaswing Sailing during certain Conditions.
- The Captain and the Parents are responsible for checking the Connection of the Mast Support and all the other Connections.
- The Captain must tighten the Belts whenever unleached during Sailtrip.
- The Child must ALWAYS wear an approved Lifejacket aboard and nearby the Waterfront



### Warning

The Mast Support of the Seaswing must be connected tightly to the Mast in the Cabin of your Boat.  
Wrong use or placement of the Seaswing may cause severe Injury or damage to the Child.